


Mapeplan® M



Roofing and waterproofing synthetic membrane

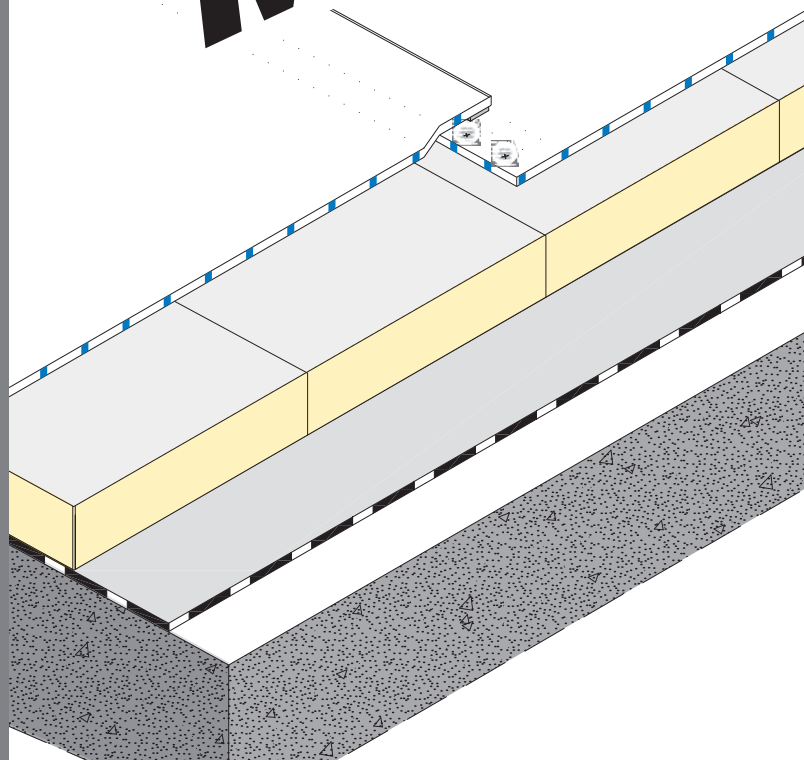

DESCRIPTION

Mapeplan® M is a synthetic roofing waterproofing membrane in PVC-P produced in one **multiextrusion coating process**, with high quality raw materials, reinforced with polyester net. **Mapeplan® M** is conform to EN 13956 standard.

APPLICATION FIELDS

Mapeplan® M is suitable for exposed roof installations and for mechanical fixing. It is resistant to ultraviolet rays and may be exposed to all weather conditions.

NORMS AND CERTIFICATIONS

CE conformity marking according to EN 13956 standard. ISO 9001 quality system certification. ISO 14001 environmental system certification. **Mapeplan® M** can contribute in the collection of LEED (Leadership in Energy and Environmental Design) Credits.



TECHNICAL CHARACTERISTICS

Mapeplan® M is a high standard quality product; it performs very good mechanical properties, best workability as well as excellent welding characteristics.

- High workability and weldability
- High mechanical resistance
- Excellent flexibility at low temperatures
- Excellent resistance to ageing
- Excellent resistance to UV rays and to weathering
- High vapour permeability

PACKAGING

PALLET	14 rolls per pallet
LENGTH OF ROLLS	25 m 20 m 15 m (according to the thickness)
WIDTH OF ROLLS	2,10 m 1,60 m 1,05 m

STORAGE

Store horizontally, shelter from sun and bad weather in a dry place.

SAFETY INSTRUCTION


Mapeplan® M is not considered dangerous according to the current safety regulation for the classification of goods and substances. The safety datasheet is therefore not compulsory for the purchase, transport and application. Precaution during use: ensure a proper change of air if the application is made in closed working environments.

TECHNICAL DATA					
PRODUCT PROPERTIES					
Product	Waterproofing membrane in PVC-P, reinforced with polyester net				
Colour	Top layer: light grey Bottom layer: dark grey				
European standard	EN 13956				
CHARACTERISTICS STANDARDS - M.U.	Mapeplan® M 12	Mapeplan® M 15	Mapeplan® M 18	Mapeplan® M 20	
Visible defects	EN 1850-2	None	None	None	None
Length (m)	EN 1848-2	25 (-0/+5%)	20 (-0/+5%)	15 (-0/+5%)	15 (-0/+5%)
Width (m)	EN 1848-2	2,10/1,60/1,05 (-0,5/+1%)	2,10/1,60/1,05 (-0,5/+1%)	2,10/1,60/1,05 (-0,5/+1%)	2,10/1,60/1,05 (-0,5/+1%)
Straightness (mm)	EN 1848-2	≤ 30	≤ 30	≤ 30	≤ 30
Flatness (mm)	EN 1848-2	≤ 10	≤ 10	≤ 10	≤ 10
Mass per unit (kg/m ²)	EN 1849-2	1,5 (-5/+10%)	1,8 (-5/+10%)	2,2 (-5/+10%)	2,5 (-5/+10%)
Effective thickness (mm)	EN 1849-2	1,2 (-5/+10%)	1,5 (-5/+10%)	1,8 (-5/+10%)	2,0 (-5/+10%)
TECHNICAL CHARACTERISTICS	Mapeplan® M 12	Mapeplan® M 15	Mapeplan® M 18	Mapeplan® M 20	
Watertightness EN 1928 B Method	Watertight				
Reaction to fire EN 13501-1	Class E				
Joint peel resistance EN 12316-2 (N/50 mm)	≥ 300				
Joint shear resistance EN 12317-2 (N/50 mm)	≥ 650				
Vapour diffusion resistance EN 1931 (μ)	19000				
Hail resistance - rigid support - flexible support EN 13583 (m/s)	≥ 18 ≥ 25	≥ 20 ≥ 30	≥ 20 ≥ 33	≥ 20 ≥ 36	
Tensile strength EN 12311-2 (N/50 mm)	≥ 1100				
Elongation at break EN 12311-2 (%)	≥ 15				
Resistance to impact - rigid support (A method) - flexible support (B method) EN 12691 (mm)	≥ 400 ≥ 900	≥ 500 ≥ 1100	≥ 600 ≥ 1500	≥ 700 ≥ 1750	
Resistance to static load - flexible support (A method) - rigid support (B method) EN 12730 (kg)	≥ 25 ≥ 25	≥ 25 ≥ 25	≥ 30 ≥ 25	≥ 30 ≥ 25	
Tear resistance EN 12310-2 (N)	≥ 200				
Dimensional stability EN 1107-2 (%)	≤ 0,5				
Foldability at low temperatures EN 495-5 (°C)	≤ -25				
UV exposure EN 1297	grade 0 - passes				
External fire performance Broof (t1) (t2) (t3) ENV 1187	available upon request				

Considering the various situations of use, the numerous types of support surfaces and the possibilities for use inside COMPLEX WATERPROOF LAYERING, Polyglass S.p.A. cannot assume any liability for damages derived from the product's results in terms of function or aesthetics.
Technical Data Sheet Rev. 1/14


MAPEPLAN® ACCESSORIES

- Mapeplan® D, membrane for details and particulars
- Mapeplan®, metal sheets coupled to Mapeplan® membrane
- Mapeplan®, internal and external prefabricated corners
- Mapeplan® ADS 200, contact adhesives
- Mapeplan® Cleaner, cleaning liquid
- Mapeplan®, outlets and special prefabricated pieces



OUTLET

MAPEPLAN® M LAYERING

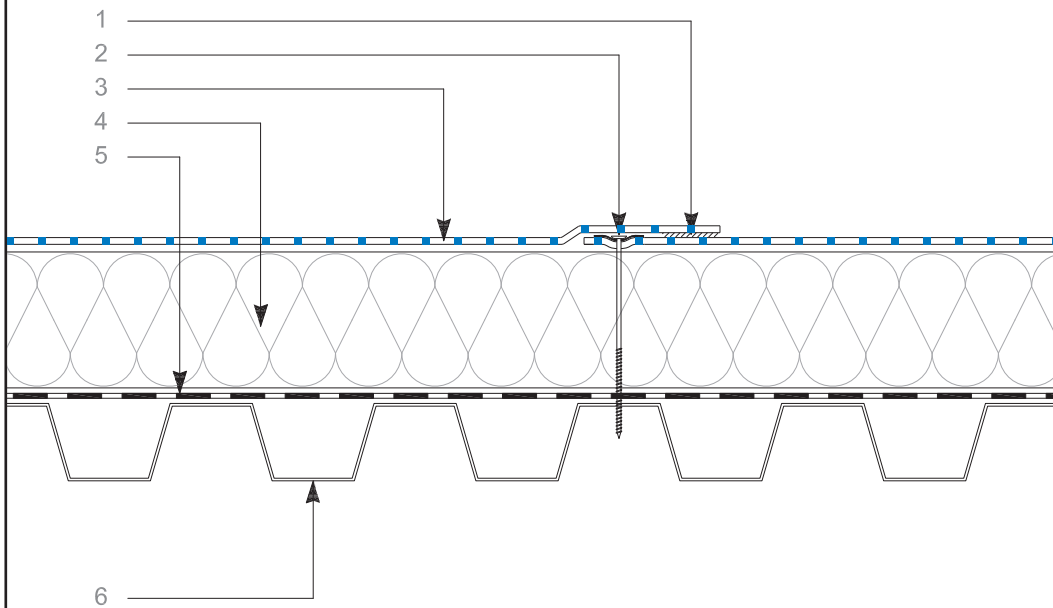

- Resistant to ageing processes
- Flexible at low temperatures
- Puncture resistant
- Hail resistant
- UV-resistant
- High workability and weldability
- Vapour permeable
- Dimensionally stable
- Excellent fire behaviour

Technical specifications of product are available on the technical books.
References for this product are available on request and on Mapei and polyglass web sites at the following addresses www.mapei.it, www.mapei.com and www.polyglass.com

LEGEND

1. Overlap/Hot air welding
2. Mechanical fixing system
3. MAPEPLAN® M, roofing membrane
4. Thermal insulation (mechanically fixed)*
5. Vapour control layer
(for example MAPEPLAN® VB PE)
6. Substrate

* Schedule a separation layer, if required



MAPEPLAN range is produced by:



Registered Office: Viale Jenner, 4 - 20159 MILANO

**Head Office: Via dell'Artigianato, 34 - 31047 Ponte di Piave (TV) - Italia
Tel. +39 04227547 - Fax +39 0422854118 - www.polyglass.com - info@polyglass.it**